

# GPX *General Purpose* Exhaust Fans

*Triangle's new GPX exhaust fans are ruggedly designed for continuous operation. They're ideal for workshops, barns, poultry houses, greenhouses, garages or anywhere ventilation is required to control condensation and stagnant air.*



GPX 1611

*Completely  
Assembled,  
Ready to Install*


- ◆ Available with 12", 16", 20" and 24" fan blades
- ◆ 115 volt Totally Enclosed Air Over (TEAO) thermally protected motors
- ◆ Heavy gauge galvanized steel frame to reduce rust and corrosion
- ◆ Built-in shutter with rigid blades for long lasting, continuous operation
- ◆ Spiral guard has a polyester powder coat finish and meets OSHA requirements
- ◆ Shutter opens and closes automatically when the fan is turned on and off



**TRIANGLE ENGINEERING  
OF ARKANSAS, INC.**

E-mail: [mail@trianglefans.com](mailto:mail@trianglefans.com) • Website: [www.trianglefans.com](http://www.trianglefans.com)  
1101 North Redmond Road • Jacksonville, Arkansas 72076  
(501) 982-7558 • **1-800-255-9014** • Fax (501) 982-5691





# GPX General Purpose Exhaust Fans

Easy installation is the term most associated with the GPX. Simply cut a *square* opening in the wall, the size shown below for housing dimension "B", **PLUS 1/4"**.

Slide the fan into the opening from the out-

side of the structure. Using 1/4" x 3/4" screws, attach the flange to your structure.

Last, connect motor to a 115 volt, 60 Hertz, single phase power source and your fan is ready to exhaust your building.

Questions? Contact our customer service department at 800-255-9014.



GPX 2413



GPX 2011



GPX 1611



GPX 1210

AVAILABLE IN 24", 20", 16" AND 12" SIZES


## FAN SPECIFICATIONS

Model No.	Blade Diam.	CFM	RPM	H.P.	Amps	Volts
GPX 1210	12"	1580	1625	1/6	2.2	115
GPX 1611	16"	2600	1650	1/4	2.3	115
GPX 2011	20"	3200	1650	1/4	2.3	115
GPX 2413	24"	5460	1100	1/2	6.1	115

Motors are Totally Enclosed Air Over (TEAO).

## HOUSING DIMENSIONS

Model No.	A Sq. (inc. flanges)	B Sq. (housing only)	C	D	Carton Cu. Ft.	Weight Lbs.
GPX 1210	18 <sup>3</sup> / <sub>4</sub> "	17"	6"	12 <sup>1</sup> / <sub>2</sub> "	2.7	35
GPX 1611	22 <sup>3</sup> / <sub>4</sub> "	21"	6"	13 <sup>3</sup> / <sub>4</sub> "	4.3	43
GPX 2011	26 <sup>3</sup> / <sub>4</sub> "	25"	6"	14 <sup>1</sup> / <sub>2</sub> "	6.2	55
GPX 2413	30 <sup>3</sup> / <sub>4</sub> "	29"	6"	15 <sup>1</sup> / <sub>2</sub> "	8.8	66

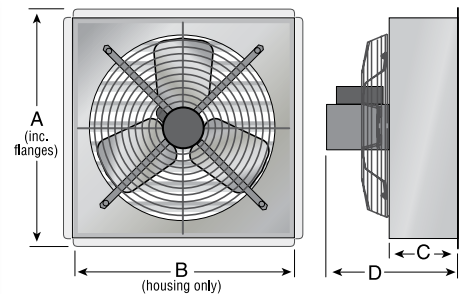

Specifications subject to change without notice. Printed in USA. Revised 7/07

For more information, contact a Triangle Dealer or Distributor near you...