

Single/Two Stage Gasoline

Your 8-gallon air compressor/generator will run your air and electric tools from one convenient machine, in times of power failure use the generator as a backup power source.



Compressor Pump

- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

Generator

- Brushless alternator
- Total harmonic distortion (THD) less than 5%
- 100% copper windings
- Comes standard with (2) 120V, 15A and (1) 240V, 20A receptacles (Two-stage models)

Frame

- Powder coated 8-gallon twin tank receivers (Portable and stationary models)
- 3/16-inch base plate to reduce vibration
- 16-gauge powder coated two-piece belt guard
- Flat-free tires (Portable models)

Components

- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 12 or 16.5-inch fly wheel
- Quality pilot valve unloader



AG1-PH65-08M1

| PORTABLE | | ALTERNATOR WATTAGE | | | | | RECEPTACLES | DISPLACEMENT/ ENGINE | COMPRESSOR | DIMENSIONS (LxWxH) | SHIP WT. | NET WT. |
|---------------|-----------------|--------------------|----------------|-----------------------------|------------------------------|------------------------------------|------------------|-------------------------|-----------------|-----------------------|----------|---------|
| MODEL NUMBER | CFM @ 90 PSI | CFM @ PSI | MAX. OUTPUT | CONT. WITH COMP. ON-LOAD | CONT. WITH COMP. OFF-LOAD | | | | | | | |
| AG1-PH65-08M1 | 12.4 | 10.9 @ 125 | 1800 watts | 600 watts | 1600 watts | (2) NEMA 5-15R | 196cc Honda OHV | Single stage, cast iron | 44.5x26x27.5in. | 257 lb. | 207 lb. | |
| AG1-PR07-08M1 | 12.4 | 10.9 @ 125 | 1800 watts | 600 watts | 1600 watts | (2) NEMA 5-15R | 211cc Subaru OHC | Single stage, cast iron | 44.5x26x27.5in. | 257 lb. | 207 lb. | |
| AG2-PH13-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 389cc Honda OHV | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |
| AG2-PK14-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 429cc Kohler OHV | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |
| AG2-PM14-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 420cc Mi-T-M OHV | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |
| AG2-PS14-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 404cc Subaru OHC | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |

| STATIONARY | | ALTERNATOR WATTAGE | | | | | RECEPTACLES | DISPLACEMENT/ ENGINE | COMPRESSOR | DIMENSIONS (LxWxH) | SHIP WT. | NET WT. |
|---------------|-----------------|--------------------|----------------|-----------------------------|------------------------------|---------------------------------|------------------|-------------------------|-------------|-----------------------|----------|---------|
| MODEL NUMBER | CFM @ 90 PSI | CFM @ 175 PSI* | MAX. OUTPUT | CONT. WITH COMP. ON-LOAD | CONT. WITH COMP. OFF-LOAD | | | | | | | |
| AG2-SH13-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 389cc Honda OHV | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |
| AG2-SK14-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 429cc Kohler OHV | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |
| AG2-SM14-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 420cc Mi-T-M OHV | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |
| AG2-SS14-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 404cc Subaru OHC | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |


| BASE-MOUNT | | ALTERNATOR WATTAGE | | | | | RECEPTACLES | DISPLACEMENT/ ENGINE | COMPRESSOR | DIMENSIONS (LxWxH) | SHIP WT. | NET WT. |
|--------------|-----------------|--------------------|----------------|-----------------------------|------------------------------|---------------------------------|------------------|-------------------------|-------------|-----------------------|----------|---------|
| MODEL NUMBER | CFM @ 90 PSI | CFM @ 175 PSI* | MAX. OUTPUT | CONT. WITH COMP. ON-LOAD | CONT. WITH COMP. OFF-LOAD | | | | | | | |
| AG2-SH13-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 389cc Honda OHV | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |
| AG2-SK14-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 429cc Kohler OHV | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |
| AG2-SM14-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 420cc Mi-T-M OHV | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |
| AG2-SS14-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 404cc Subaru OHC | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |

*Equipped with 150-PSI maximum rated regulator.

Single/Two Stage Gasoline



To see more online, scan here or go to www.mitm.com:

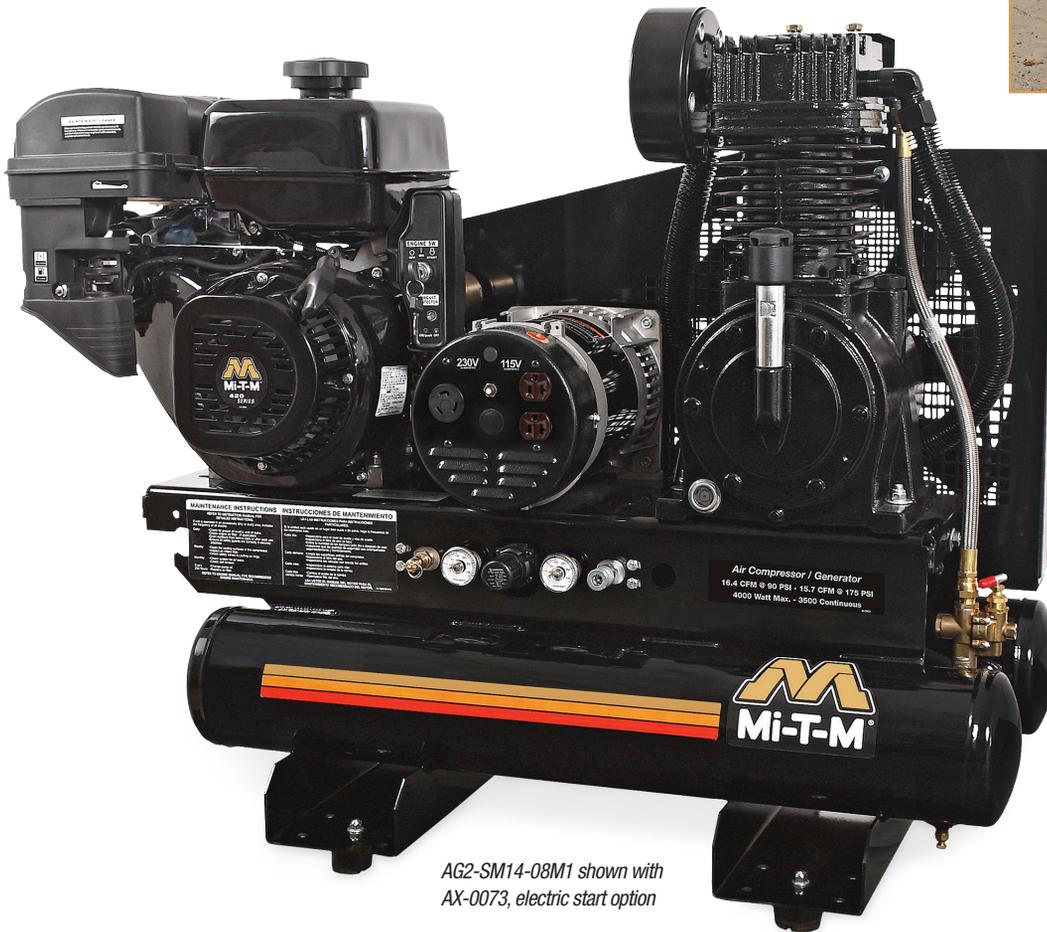

AG2-SM14-08M1 shown with AX-0073, electric start option

Limited Warranties:

1 Year Mi-T-M Engine **3 Year** Honda Engine

2 Year Pump Exchange **3 Year** Kohler Engine

See page 60 for information

2 Year Alternator **5 Year** Subaru Engine



Accessories & Options:

| PART NUMBER | DESCRIPTION | FITS MODELS | PART NUMBER | DESCRIPTION | FITS MODELS |
|--------------|---|---|-------------|--|-------------------------|
| 70-0357 | Engine oil drain extension | AG1-PH65-08M1 | AX-0067 | Electric start - battery and cables not included | AG1-PR07-08M1 |
| 70-0358 | Engine oil drain extension | Two stage Honda, Kohler & Mi-T-M models | AX-0068 | Idle down - includes electric start, battery not included | Two stage Honda models |
| 70-0380 | Engine oil drain extension | Subaru models | AX-0069 | Idle down - includes electric start, battery not included | Two stage Subaru models |
| 854-0093 | Service truck mount kit - recommended for models that are mounted in service truck applications | Two stage portable & stationary models | AX-0071 | Electric start - battery, box and cables not included | Kohler models |
| AW-6000-1002 | Equipment cover | All models | AX-0072 | Electric start - battery box and cables included, battery not included | Kohler models |
| AX-0019 | Electric start - battery, box and cables not included | Two stage Honda models | AX-0073 | Electric start - battery, box and cables not included | Mi-T-M models |
| AX-0028 | Lifting hook | Two stage portable & stationary models | AX-0074 | Electric start - battery box and cables included, battery not included | Mi-T-M models |
| AX-0062 | Electric start - battery, box and cables not included | Two stage Subaru models | AX-0075 | Idle down - includes electric start, battery not included | Mi-T-M models |
| AX-0063 | Lifting hook | Base-mount models | IX-0055 | Remote start/choke; 6-ft. wire extension for key switch; you will also need to order AX-0019 | Two stage Honda models |
| AX-0064 | Electric start - battery box and cables included, battery not included | Two stage Honda models | | | |
| AX-0065 | Electric start - battery box and cables included, battery not included | Two stage Subaru models | | | |