

# LARICK

## 410 SHAPER/SANDER



Designed and manufactured to give years of dependable service, the Larick 410 will shape and sand a wide variety of workpieces. Features include a 6" wide feed chain with four staggered rows of hold down tires • front adjusting handwheels with digital readouts for horizontal and vertical shaper and sander positions • AC inverter controlled variable speed for shaper, sanders, and feed featuring digital readouts for speed and load • Floating heads are optional which allow shaping and sanding of arched panels. The user friendly design makes setup and profile changeovers quick and easy.



**LARICK MACHINERY, INC.**

409-A DELOZIER DR.  
FORT COLLINS, CO 80524

PHONE 970-224-3061 FAX 970-224-9519

**USER FRIENDLY MACHINERY**

INNOVATIVE LEADER IN  
PROFILE SHAPING & SANDING

[www.larickmachinery.com](http://www.larickmachinery.com) [info@larickmachinery.com](mailto:info@larickmachinery.com)

# LARICK MODEL 410 SHAPER/SANDER




## CONTROL UNIT

- AC inverter controlled variable speed for Shaper, Sanders, and Feed
- NEW, easy-to-use touchscreen displays RPM and Load for each motor
- Shaper brake is standard for safer operation
- Backlit LCD screen with adjustable height swivels to provide for a better view.
- 208-230 or 460 volt/3PH/50-60 HZ




## SHAPER STATION & FENCE

- 7 1/2 HP Shaper Motor
- Variable speed from 4000 to 7000 RPM
- Horizontal and Vertical adj with digital position indicators
- 1 1/4" spindle dia., 4" to 7" dia. cutter capacity
- Optional: floating head for shaping arched panels
- 5 adjustable preset fence positions
- "Chipbreaker" fence almost eliminates splintering without a messy, costly, 2nd hogging shaper
- Push bar to feed arched panels squarely

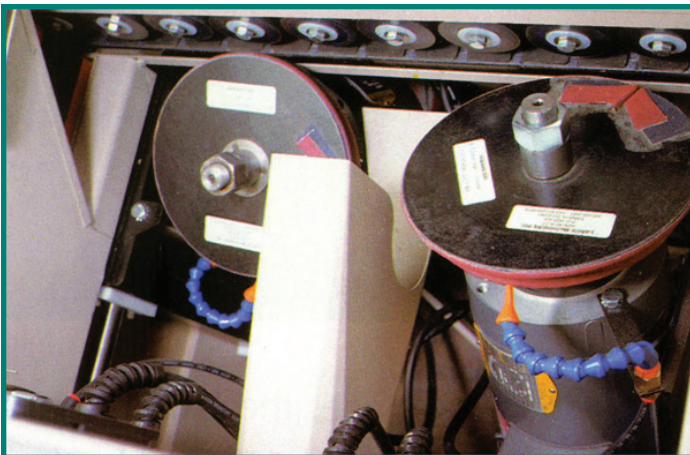

## SANDING STATIONS

- Two sanding stations with 1" counter rotating spindles
- 2 HP motors, 400 to 1800 RPM variable speed
- Each station tilts forward 60° and backward 40°
- Horizontal and verticle adj. with digital position indicators
- Air jet cleaning/cooling devices at each station
- Will accommodate up to 9" diameter sanding wheels
- Optional: Floating heads for sanding arched panels

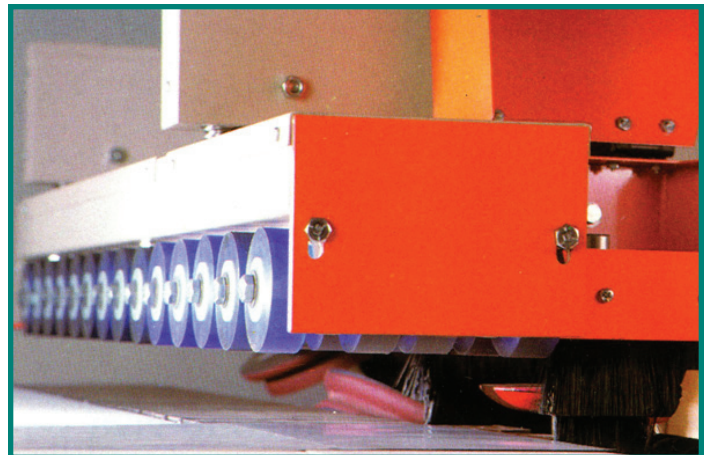

## CONVEYOR SYSTEM

- 6 inch wide heavy duty track with 4 staggered rows of hold down tires for part stability
- 3/4 HP feed motor, 0 to 20 FPM
- 14 1/2" wide table for product support
- Handles workpieces up to 1 3/4" thick

Floor space: 75" x 36" x 54" • Machine Weight: 1325 Lbs.

Specifications subject to change without notice.

**LARICK MACHINERY, INC.**  
409-A DELOZIER DR.  
FORT COLLINS, CO 80524

PHONE 970-224-3061 FAX 970-224-9519  
www.larickmachinery.com info@larickmachinery.com