



Cold Water Electric Direct Drive

JP Series

The portable electric JP Series features quiet operation and no exhaust which is ideal for indoor applications where exhaust fumes are prohibited. Designed for medium duty, commercial use.



JP-2003-1ME1

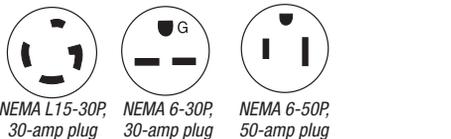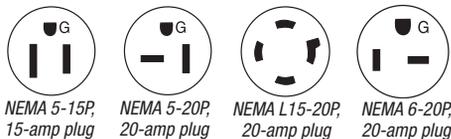

SA USA & Canada:
JP-1002 &
JP-1502 Models
CSA CERTIFIED

SA JP-2003, JP-2503
& JP-3004 Models
CSA CERTIFIED

Pump

- Direct drive triplex piston General or AR pump with ceramic plungers
- Stainless-steel and brass unloader with adjustable pressure
- Forged brass manifold
- Thermal and safety relief valves
- In-line water strainer
- Adjustable low pressure detergent injection

Motor

- Totally enclosed fan-cooled electric motor
- 35-foot power cord (ground fault circuit interrupter, GFCI, on 1.5 to 6.0-HP single-phase models) (10-foot power cord on 8.0-HP models)
- NEMA 5-20P, 20 amp plug (1500-PSI models)

Frame

- 1-inch powder coated steel tube handles for easier pulling
- Powder coated and welded steel base plate
- Convenient gun/wand holder and hose wrap

- Solid steel axle (threaded on 2000 to 3000-PSI models)
- Pneumatic tires with tubes for longer life
- Dual rubber isolators

Unit Includes

- Variable high/low pressure nozzle on 1000 to 2000-PSI models
- Quick connect nozzles (0°, 15° and 25°) on 2500 & 3000-PSI models
- 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors (25-foot on JP-1002, JP-1502 & JP-2003 models)
- Professional-grade insulated trigger gun with safety lock-off
- 36-inch lance with rubber grip

Warranties



Model Number	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
JP-1002-3ME1*	1000	2.0	1.5 HP, 120V, 1Ø, 15.0A	NEMA 5-15P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1002-2ME1*#	1000	2.0	1.5 HP, 120V, 1Ø, 15.0A	NEMA 5-15P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1502-3ME1*	1500	2.0	2.0 HP, 120V, 1Ø, 20.0A	NEMA 5-20P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1502-2ME1*#	1500	2.0	2.0 HP, 120V, 1Ø, 20.0A	NEMA 5-20P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-2003-1ME1*	2000	2.8	4.0 HP, 230V, 1Ø, 16.0A	NEMA 6-20P	37in.x21in.x24.5in.	162 lbs.	112 lbs.
JP-2503-1ME1*	2500	3.2	6.0 HP, 230V, 1Ø, 24.1A	NEMA 6-30P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-2503-0ME3	2500	3.2	6.0 HP, 230V, 3Ø, 15.0A or 6.0 HP, 460V, 3Ø, 7.5A	NEMA L15-20P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-3004-1ME1	3000	3.9	8.0 HP, 230V, 1Ø, 34.5A	NEMA 6-50P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-3004-0ME3	3000	3.9	8.0 HP, 230V, 3Ø, 20.0A or 8.0 HP, 460V, 3Ø, 10.0A	NEMA L15-30P	44in.x26in.x27in.	275 lbs.	225 lbs.

*35-foot cord with ground fault circuit interrupter (GFCI).

#Pump accepts incoming water up to 175°F.

ACCESSORIES & OPTIONS

Part Number	Description	Fits Models
50-0161	High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up	All models
CX-0005	Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips	All models
CX-0066	460V on 6.0-HP, 3-phase models - For when you have 460V of power available	JP-2503-0ME3
CX-0067	460V on 8.0-HP, 3-phase models - For when you have 460V of power available	JP-3004-0ME3
TX-1002-W	Puncture-proof tires - Tires are flat-free and maintenance-free, 10-inch, white hub, two tires	1000 to 2000-PSI models
TX-1302-W	Puncture-proof tires - Tires are flat-free and maintenance-free, 13-inch, white hub, two tires	2500 to 3000-PSI models