


# 12" Abrasive - Mitering Cut-Off

Featured with optional dust collector, fume exhauster (patented), cabinet base and hood

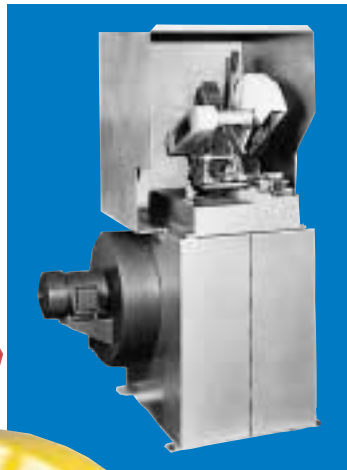

Featured with optional cam lock vise

## Specifications

### Wheel Capacity

12" diameter.

### Arbor Shaft

1 inch.

### Motor

Special hi-torque totally-enclosed fan-cooled 5 H.P. 1 or 3 phase.

### Starter

Magnetic with thermal overload.

### Drive

Positive timing belt.

### Spindle Bearings

Heavy-duty sealed ball bearings. Lubricated for life.

### Capacity

1 3/4" solids. 3" pipe.

45° - most 2 1/4" shapes.

### Safety Guards

Cut-off wheel and belt guards exceed safety code requirements.

### Vise

Manually operated. Opens to 3 1/2".

### Stop

Adjustable down stop limits depth of chop stroke.

### Mitering

Cutting head can swivel 45° left of center. Indicators for 15°, 30° and 45°. Cutting head and pedestal are mounted on a rugged swing arm secured in lubricated-for-life bearings. Lock to hold desired angle is quick and easy to operate.

### Options

#### Patented Dust Collector and Fume Exhauster

(See page 17.)

#### Quick-Action Cam Lock Vise

#### Hood

#### Shipping Weight

150 lbs. 275 with cabinet base.  
10 wheels, 14 lbs.

<b>COMPLETE with 5 H.P. TEFC motor, magnetic starter, vise</b>	
(specify voltage/phase/hertz when ordering <b>USE CHART OPPOSITE PAGE</b> )	.....12013F
Cabinet base	.....129300
Dust collector fume exhauster (includes cabinet base) (see page 17)	.....129302
Hood (for use with cabinet base)	.....129020
Adjustable outboard support (see pages 17)	.....129403
Oil mist spray (for cutting nonferrous materials)	.....129502
Quick-action cam lock vise	.....129430

*Use Everett 45FG Abrasive cut-off wheels for long life*

Prices and design subject to change without notice.