

Single Stage Gasoline

The Mi-T-M 8-gallon single stage gasoline air compressor supplies more power than what a standard tool can deliver and is the ideal air compressor for construction applications.

To see more online, scan here or go to www.mitm.com:



Compressor Pump


- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

Frame

- Powder coated 8-gallon twin tank receivers
- 1/16-inch base plate to reduce vibration
- 16-gauge powder coated two-piece belt guard
- Flat-free tires

Components

- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 12-inch fly wheel
- Quality pilot valve unloader

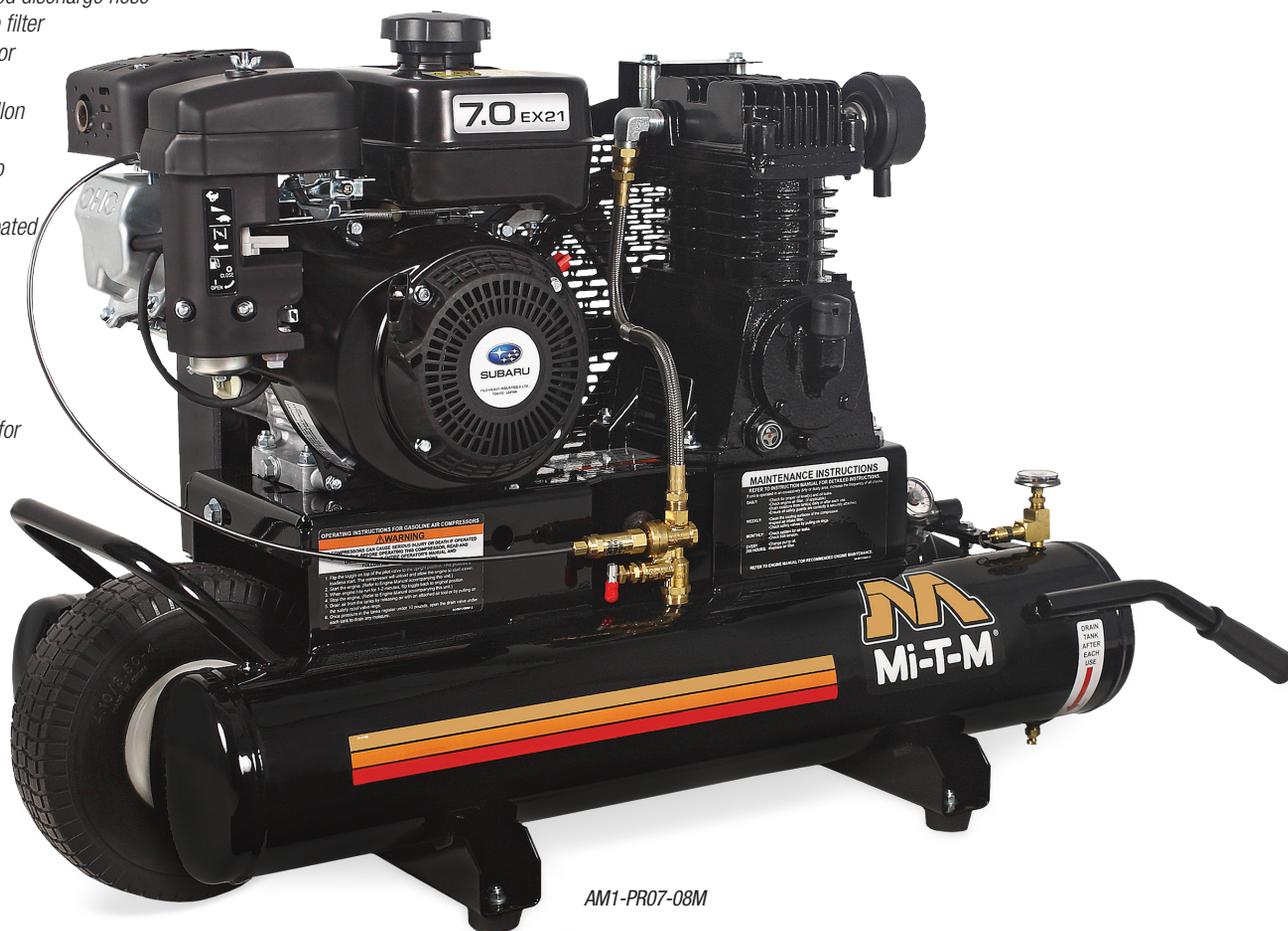

AM1-PR07-08M

Limited Warranties:

2 Year Pump Exchange
3 Year Kohler Engine

See page 60 for information

3 Year Honda Engine
5 Year Subaru Engine

MODEL NUMBER	CFM @ PSI	DISPLACEMENT/ENGINE	COMPRESSOR	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AM1-PH65-08M	13.9 @ 90	196cc Honda OHV	Single stage, cast iron	8-gallon	Pneumatic	44.5x18.5x27in.	200 lb.	175 lb.
AM1-PK07-08M	13.9 @ 90	208cc Kohler OHV	Single stage, cast iron	8-gallon	Cable throttle	44.5x18.5x27in.	200 lb.	175 lb.
AM1-PR07-08M	13.9 @ 90	211cc Subaru OHC	Single stage, cast iron	8-gallon	Cable throttle	44.5x18.5x27in.	200 lb.	175 lb.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
33-0294	Cable throttle control	AM1-PH65-08M	AW-6000-1002	Equipment cover	All models
70-0357	Engine oil drain extension	Honda & Kohler models	AX-0003	Manual drain/regulator/metal bowl	All models
70-0380	Engine oil drain extension	AM1-PR07-08M	AX-0067	Electric start - battery and cables not included	AM1-PR07-08M