



TRLR70XF Trailer

Brake Hose Cover Installation

The following instructions are intended to assist the user in the installation of the Brake Hose Cover Kit for use on the TRLR70XF Trailer and WT5C Water Trailer. Please read all assembly instructions before installing the kit.

REQUIRED TOOLS

- 3/8" Ratchet with 3/8" and 7/16" sockets
- Drill and 5/16" drill bit.

PARTS

Verify that all parts are accounted for. See Figure 1 and Table 1.

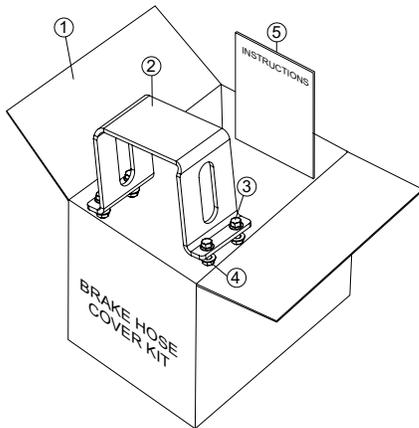


Figure 1. Brake Hose Cover Kit

Table 1. Brake Hose Kit

Item No.	Part No.	Description	QTY.	Remarks
1	49976	Kit, Brake Hose Cover	1	Includes items 2-5
2	49975	Brake Hose Cover, Bolt On	1	
3	49048	Screw, HHF 1/4-20 x 3/4 GR5	4	
4	49070	Nut, Flanged 1/4-20 Serrated PLTD	4	
5	49979	Instructions, Brake Hose Cover Kit	1	

WORK SAFELY!

Only a **qualified service technician** with proper training should perform this installation. Follow all shop safety rules when performing this installation.

PREPARATION

1. Make sure the unit is turned off and engine is cool.
2. Place the trailer in an area free of dirt and debris.

3. Make sure trailer is placed on secure level ground with chock blocks underneath each wheel to prevent rolling.

BRAKE HOSE COVER INSTALLATION

1. Locate brake hose cover P/N 49975 and remove screws and nuts if attached.
2. Next, place brake hose cover **over the brake line fitting** as shown in Figure 2 with the notched side of the cover facing towards the brake actuator.
3. Using a scribe, transfer the hole pattern on the brake line cover to the trailer frame.
4. Using a 5/16" drill bit, drill four holes as shown in Figure 2. Deburr all holes.
5. Using the 3/8" and 7/16" sockets, secure the brake hose cover to the trailer frame with the supplied 1/4-20 x 3/4 screws, P/N 49048 and 1/4-20 serrated flanged nuts, P/N 49070.
6. Tighten all four flanged nuts securely.

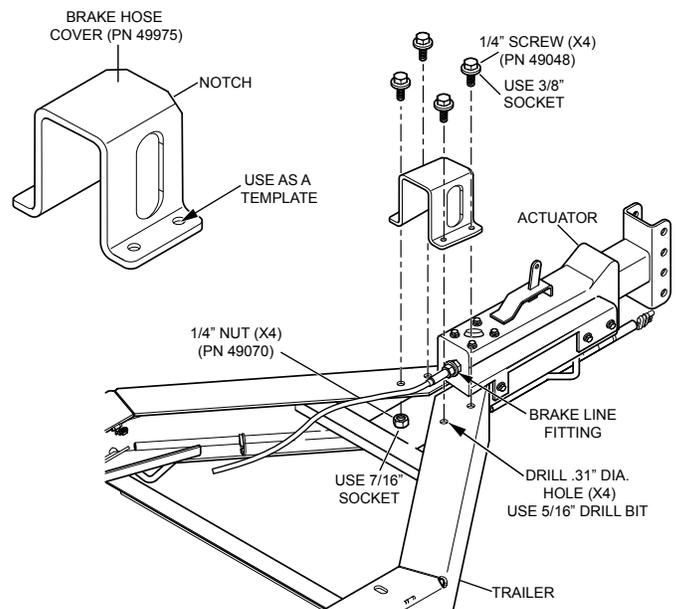


Figure 2. Brake Hose Cover Installation



TRLR70XF Trailer

Brake Hose Cover Installation

HERE'S HOW TO GET HELP

PLEASE HAVE THE MODEL AND SERIAL
NUMBER ON-HAND WHEN CALLING

UNITED STATES

Multiquip Corporate Office

18910 Wilmington Ave. Tel. (800) 421-1244
Carson, CA 90746 Fax (310) 537-3927
Contact: mq@multiquip.com

Service Department

800-421-1244 Fax: 310-537-4259
310-537-3700

Technical Assistance

800-478-1244 Fax: 310-943-2238

MQ Parts Department

800-427-1244 Fax: 800-672-7877
310-537-3700 Fax: 310-637-3284

Warranty Department

800-421-1244 Fax: 310-943-2249
310-537-3700

MEXICO

MQ Cipsa

Carr. Fed. Mexico-Puebla KM 126.5 Tel: (52) 222-225-9900
Momoxpan, Cholula, Puebla 72760 Mexico Fax: (52) 222-285-0420
Contact: pmastretta@cipsa.com.mx

CANADA

Multiquip

4110 Industriel Boul. Tel: (450) 625-2244
Laval, Quebec, Canada H7L 6V3 Tel: (877) 963-4411
Contact: jmartin@multiquip.com Fax: (450) 625-8664

UNITED KINGDOM

Multiquip (UK) Limited Head Office

Unit 2, Northpoint Industrial Estate, Tel: 0161 339 2223
Globe Lane, Fax: 0161 339 3226
Dukinfield, Cheshire SK16 4UJ
Contact: sales@multiquip.co.uk

© COPYRIGHT 2013, MULTIQUIP INC.

Multiquip Inc and the MQ logo are registered trademarks of Multiquip Inc. and may not be used, reproduced, or altered without written permission. All other trademarks are the property of their respective owners and used with permission.

The information and specifications included in this publication were in effect at the time of approval for printing. Illustrations, descriptions, references and technical data contained in this document are for guidance only and may not be considered as binding. Multiquip Inc. reserves the right to discontinue or change specifications, design or the information published in this publication at any time without notice and without incurring any obligations.

Your Local Dealer is:

